

## Jet




### Specifikationer

Udformning:	Polycarbonat
Afskærmning:	Opal
Spænding:	220-240V ~ 50-60 Hz
Driver:	On/Off, 1-10V, DSI & DALI
Levetid:	100.000 timer fejlrate max. 10%
Flimrer:	≤ 4 %
Montage:	Påmonteret & nedhængt
Lysnedgang:	L80/B10>60.000 timer v/Ta 25°C
SDCM:	MacAdam 3
Lysudbytte:	<152lm/Watt
Farve:	Grå
Producentgaranti:	5 år
Lysfarve:	3000K, 4000K

Wattage	Dimensioner			Vægt	Lysfarve	Ra-værdi	Lumen
	A	B	H				
18W	1277	116	99	2,4	4000K	>80	2750 lm
25W	1277	116	99	2,4	4000K	>80	3750 lm
37W	1277	116	99	2,4	4000K	>80	5250 lm
18W	1277	116	99	2,4	3000K	>80	2600 lm
25W	1277	116	99	2,4	3000K	>80	3550 lm
37W	1277	116	99	2,4	3000K	>80	5000 lm
30W	1577	116	99	3,2	4000K	>80	4475 lm
48W	1577	116	99	3,2	4000K	>80	6650 lm
30W	1577	116	99	3,2	3000K	>80	4250 lm
48W	1577	116	99	3,2	3000K	>80	6300 lm

### Yderligere informationer

### Tekniske mål og tegninger

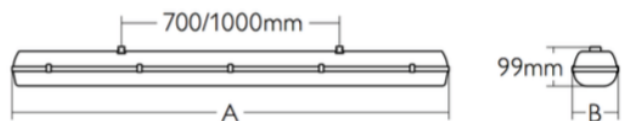

### Overensstemmelser



### Photometrisk data

