

Solow XLED




Specifikationer

Udformning:	Zink belagt stål krop
Afskærmning:	Lenzer PMMA
Spænding:	220-240V ~ 50-60 Hz
Driver:	CC & CC-DA
Levetid:	100.000 timer fejlrate max. 10%
Flimrer	≤ 4 %
Montage:	Påmonteret & nedhængt
Lysnedgang:	L70/B10 > 100.000 timer v/Ta 40°C
SDCM:	MacAdam 3
Lysudbytte:	< 150lm/Watt
Farve:	Sølv (RAL9006)
Producentgaranti:	5 år
Styringstilvalg:	Smart+ & Smartsan
Lysfarve:	4000K

Wattage	Dimensioner			Vægt	Lysfarve	Ra-værdi	Lumen
	A	B	H				
68W	1434	236	55	8,3	4000K	>80	10585 lm
119W	1434	236	55	8,3	4000K	>80	17695 lm
188W	1434	236	55	8,5	4000K	>80	25870 lm
205W	1434	360	55	12,2	4000K	>80	30785 lm
229W	1434	360	55	12,2	4000K	>80	37100 lm

Yderligere informationer

Tekniske mål og tegninger

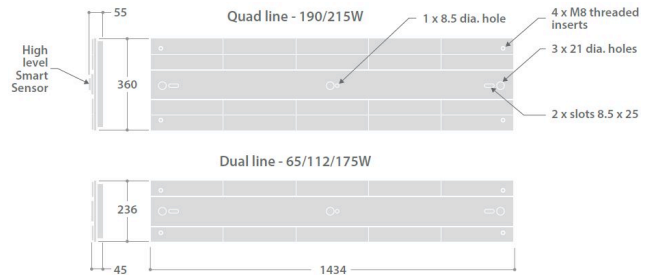

Overensstemmelser



Photometrisk data

