


## Zero

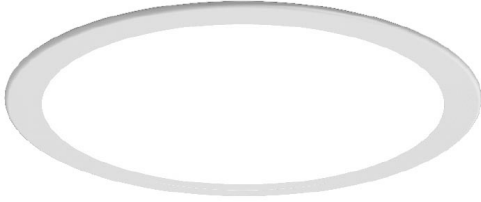

### Specifikationer


Udformning:	Hvidlakeret stålplade
Afskærmning:	Opal eller mikroprismatisk
Spænding:	220-240V ~ 50-60 Hz
Driver:	CC & CC-DA
Levetid:	100.000 timer fejlrate max. 10%
Flimrer:	≤ 4 %
Montage:	Indbyg eller påbygning
Lysnædgang:	L80/B10 > 60.000 timer v/Ta 25°C
SDCM:	MacAdam 3
Lysudbytte:	< 121 lm/Watt
Farve:	Hvid
Producentgaranti:	5 år
Styringstilvalg:	ILD og ESA
Lysfarve:	3000K, 4000K

Wattage	Dimensioner			Vægt	Lysfarve	Ra-værdi	Lumen
	Ø	B	H				
12W	385	405	93	2,9	3000K	>80	1300 lm
16W	385	405	93	2,9	3000K	>80	1850 lm
23W	385	405	93	2,9	3000K	>80	2600 lm
30W	385	405	93	2,9	3000K	>80	3250 lm
12W	385	405	93	2,9	4000K	>80	1350 lm
16W	385	405	93	2,9	4000K	>80	1950 lm
23W	385	405	93	2,9	4000K	>80	2700 lm
30W	385	405	93	2,9	4000K	>80	3400 lm

### Yderligere informationer

Mulighed for UGR<19 med mikroprismatisk afskærmning


Mulighed for montage i fast loft



### Tekniske mål og tegninger



### Overensstemmelser



### Photometrisk data

